


Auro™ Series

X » Q » S

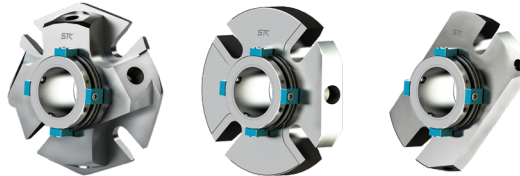


Features

- 3 Modular Designs  Special Shape Seal Face
- ISO and ANSI Pumps  XtraDiamond™ Seal Face
- Others design on request  XtraLast™ FFKM O-Rings

Designed and manufactured in Toledo-Spain



Type X

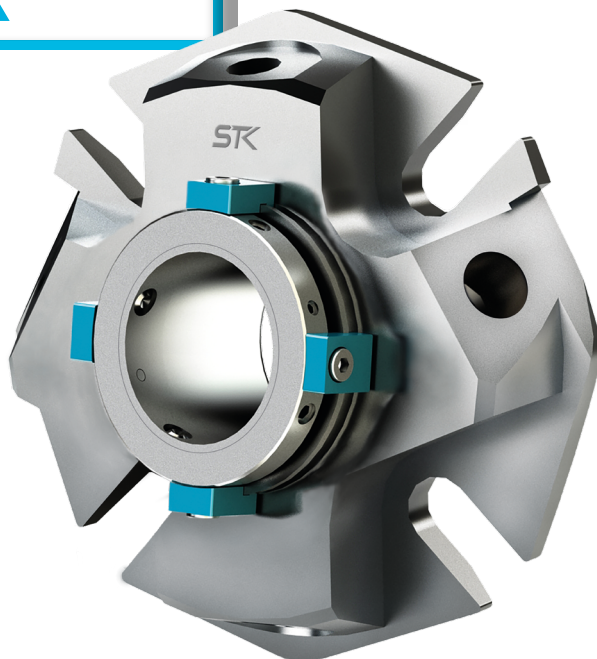


Performance Capabilities

- Sizes: from 25mm up to 100mm
- Temperature: from -40°C to +280°C (depending O-Ring resistance)
- Pressure: up to 25bar (depending PV Factor)
- Speed: up to 16m/s (depending PV Factor)



 Data Sheet

Type Q

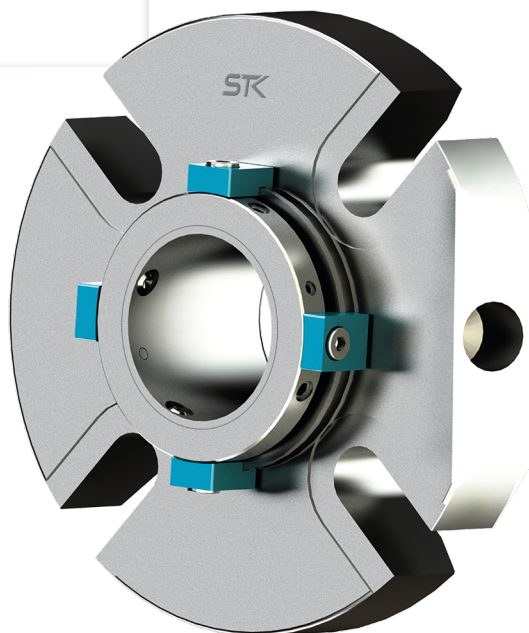


Performance Capabilities

- **Sizes:** from 25mm up to 100mm
- **Temperature:** from -40°C to +280°C (depending O-Ring resistance)
- **Pressure:** up to 25bar (depending PV Factor)
- **Speed:** up to 16m/s (depending PV Factor)



Type S

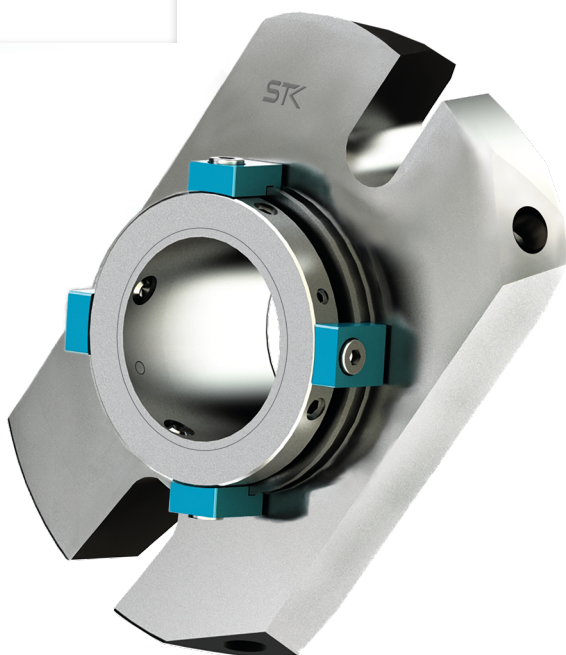

Performance Capabilities

- **Sizes:** from 25mm up to 70mm
- **Temperature:** from -40°C to +280°C (depending O-Ring resistance)
- **Pressure:** up to 25bar (depending PV Factor)
- **Speed:** up to 16m/s (depending PV Factor)



STK Stramek



and others on demand ...

Toledo Factory



Stramek.com

Follow us on:

